

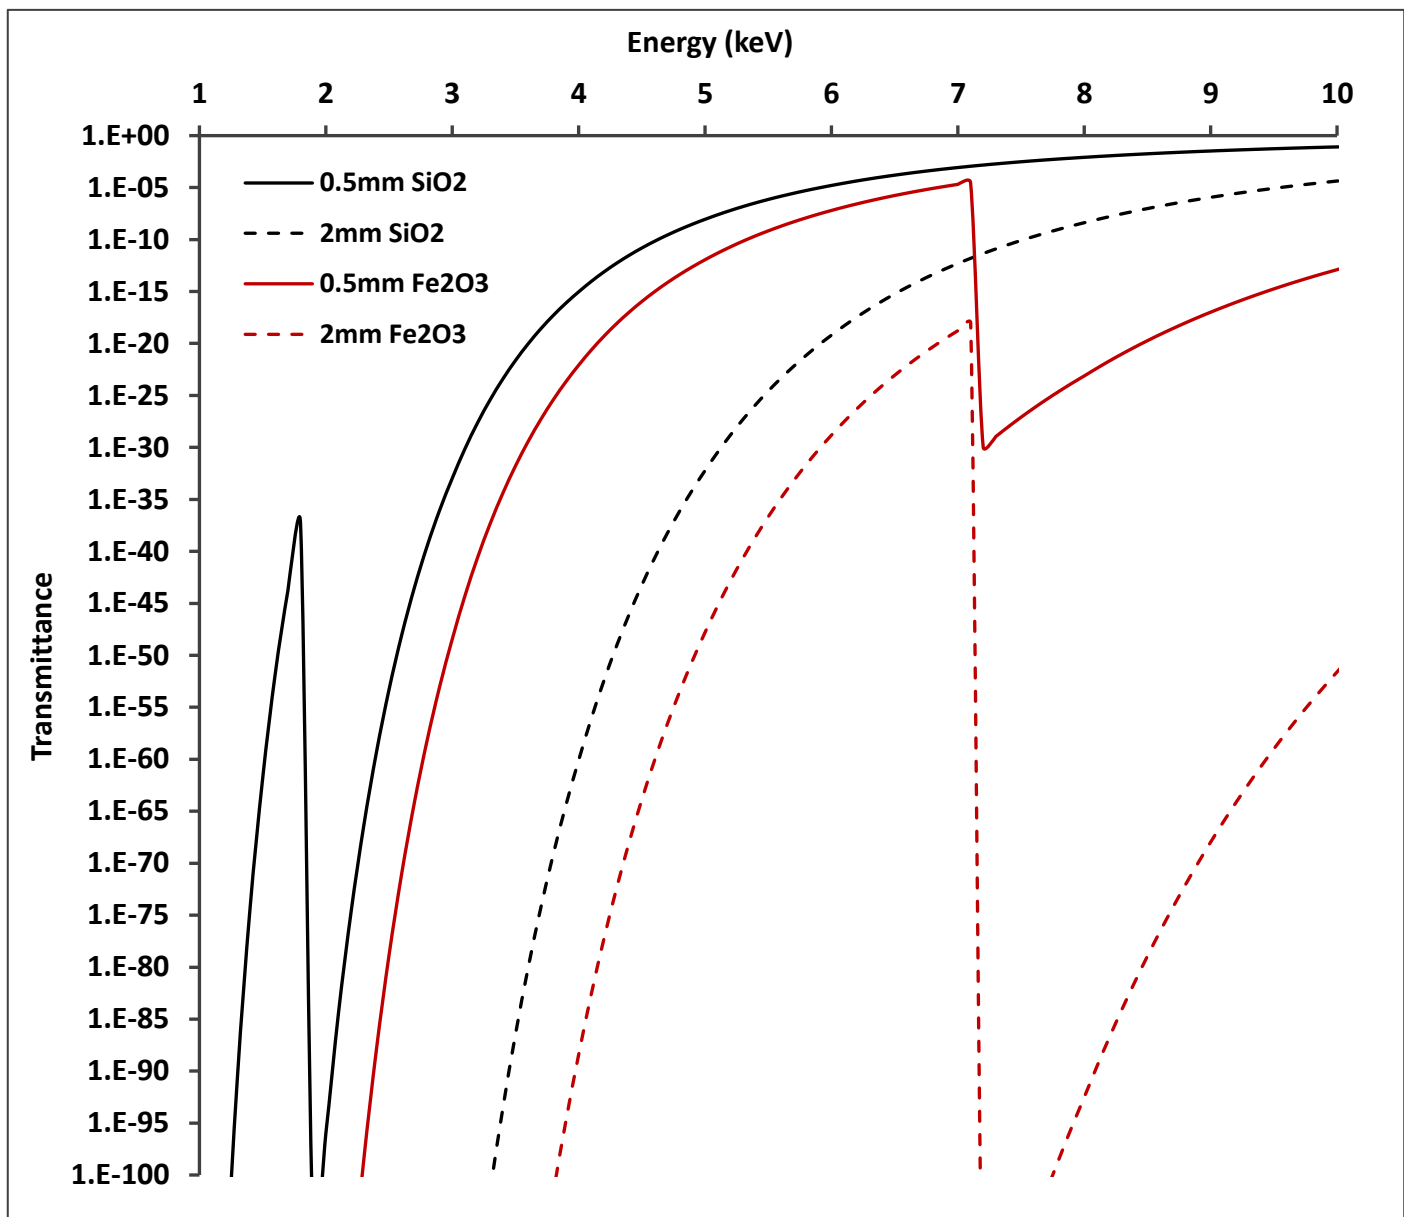


Figure A: XRF signal attenuation on the pellets with a thickness of 0.5 and 2 mm for the matrices of quartz (SiO_2) or hematite (Fe_2O_3).